

Project Location



**Montana Fish,
Wildlife & Parks**

Spotted Dog WMA
2016


BOUNDARY FENCING

FWP PROJECT #7115701

SHEET INDEX

1. Title Sheet
2. Overall Site Plan
3. Site Plan Segment A-B
4. Fencing Details
5. Fencing Details

Montana Fish, Wildlife & Parks
Design & Construction
1522 9th Ave. Helena, MT 59620
406-841-4000 (ph)
406-841-4004 (fax)

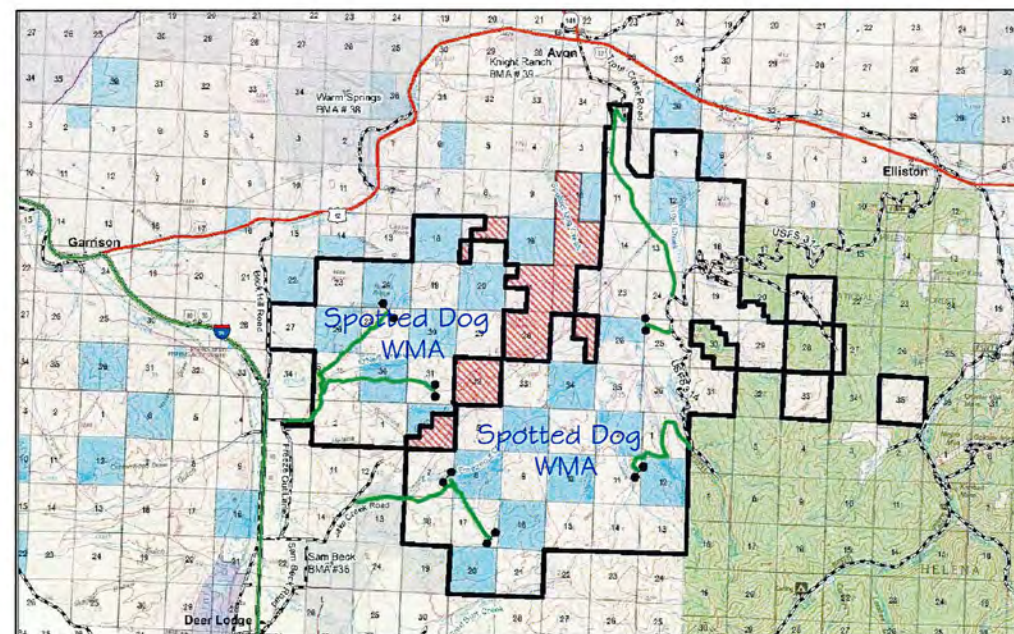


J. Mongoven	6/2016				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:



**Montana Fish,
Wildlife & Parks**

Title Sheet
Spotted Dog WMA (near Avon, MT)

SHEET: 1 of 5

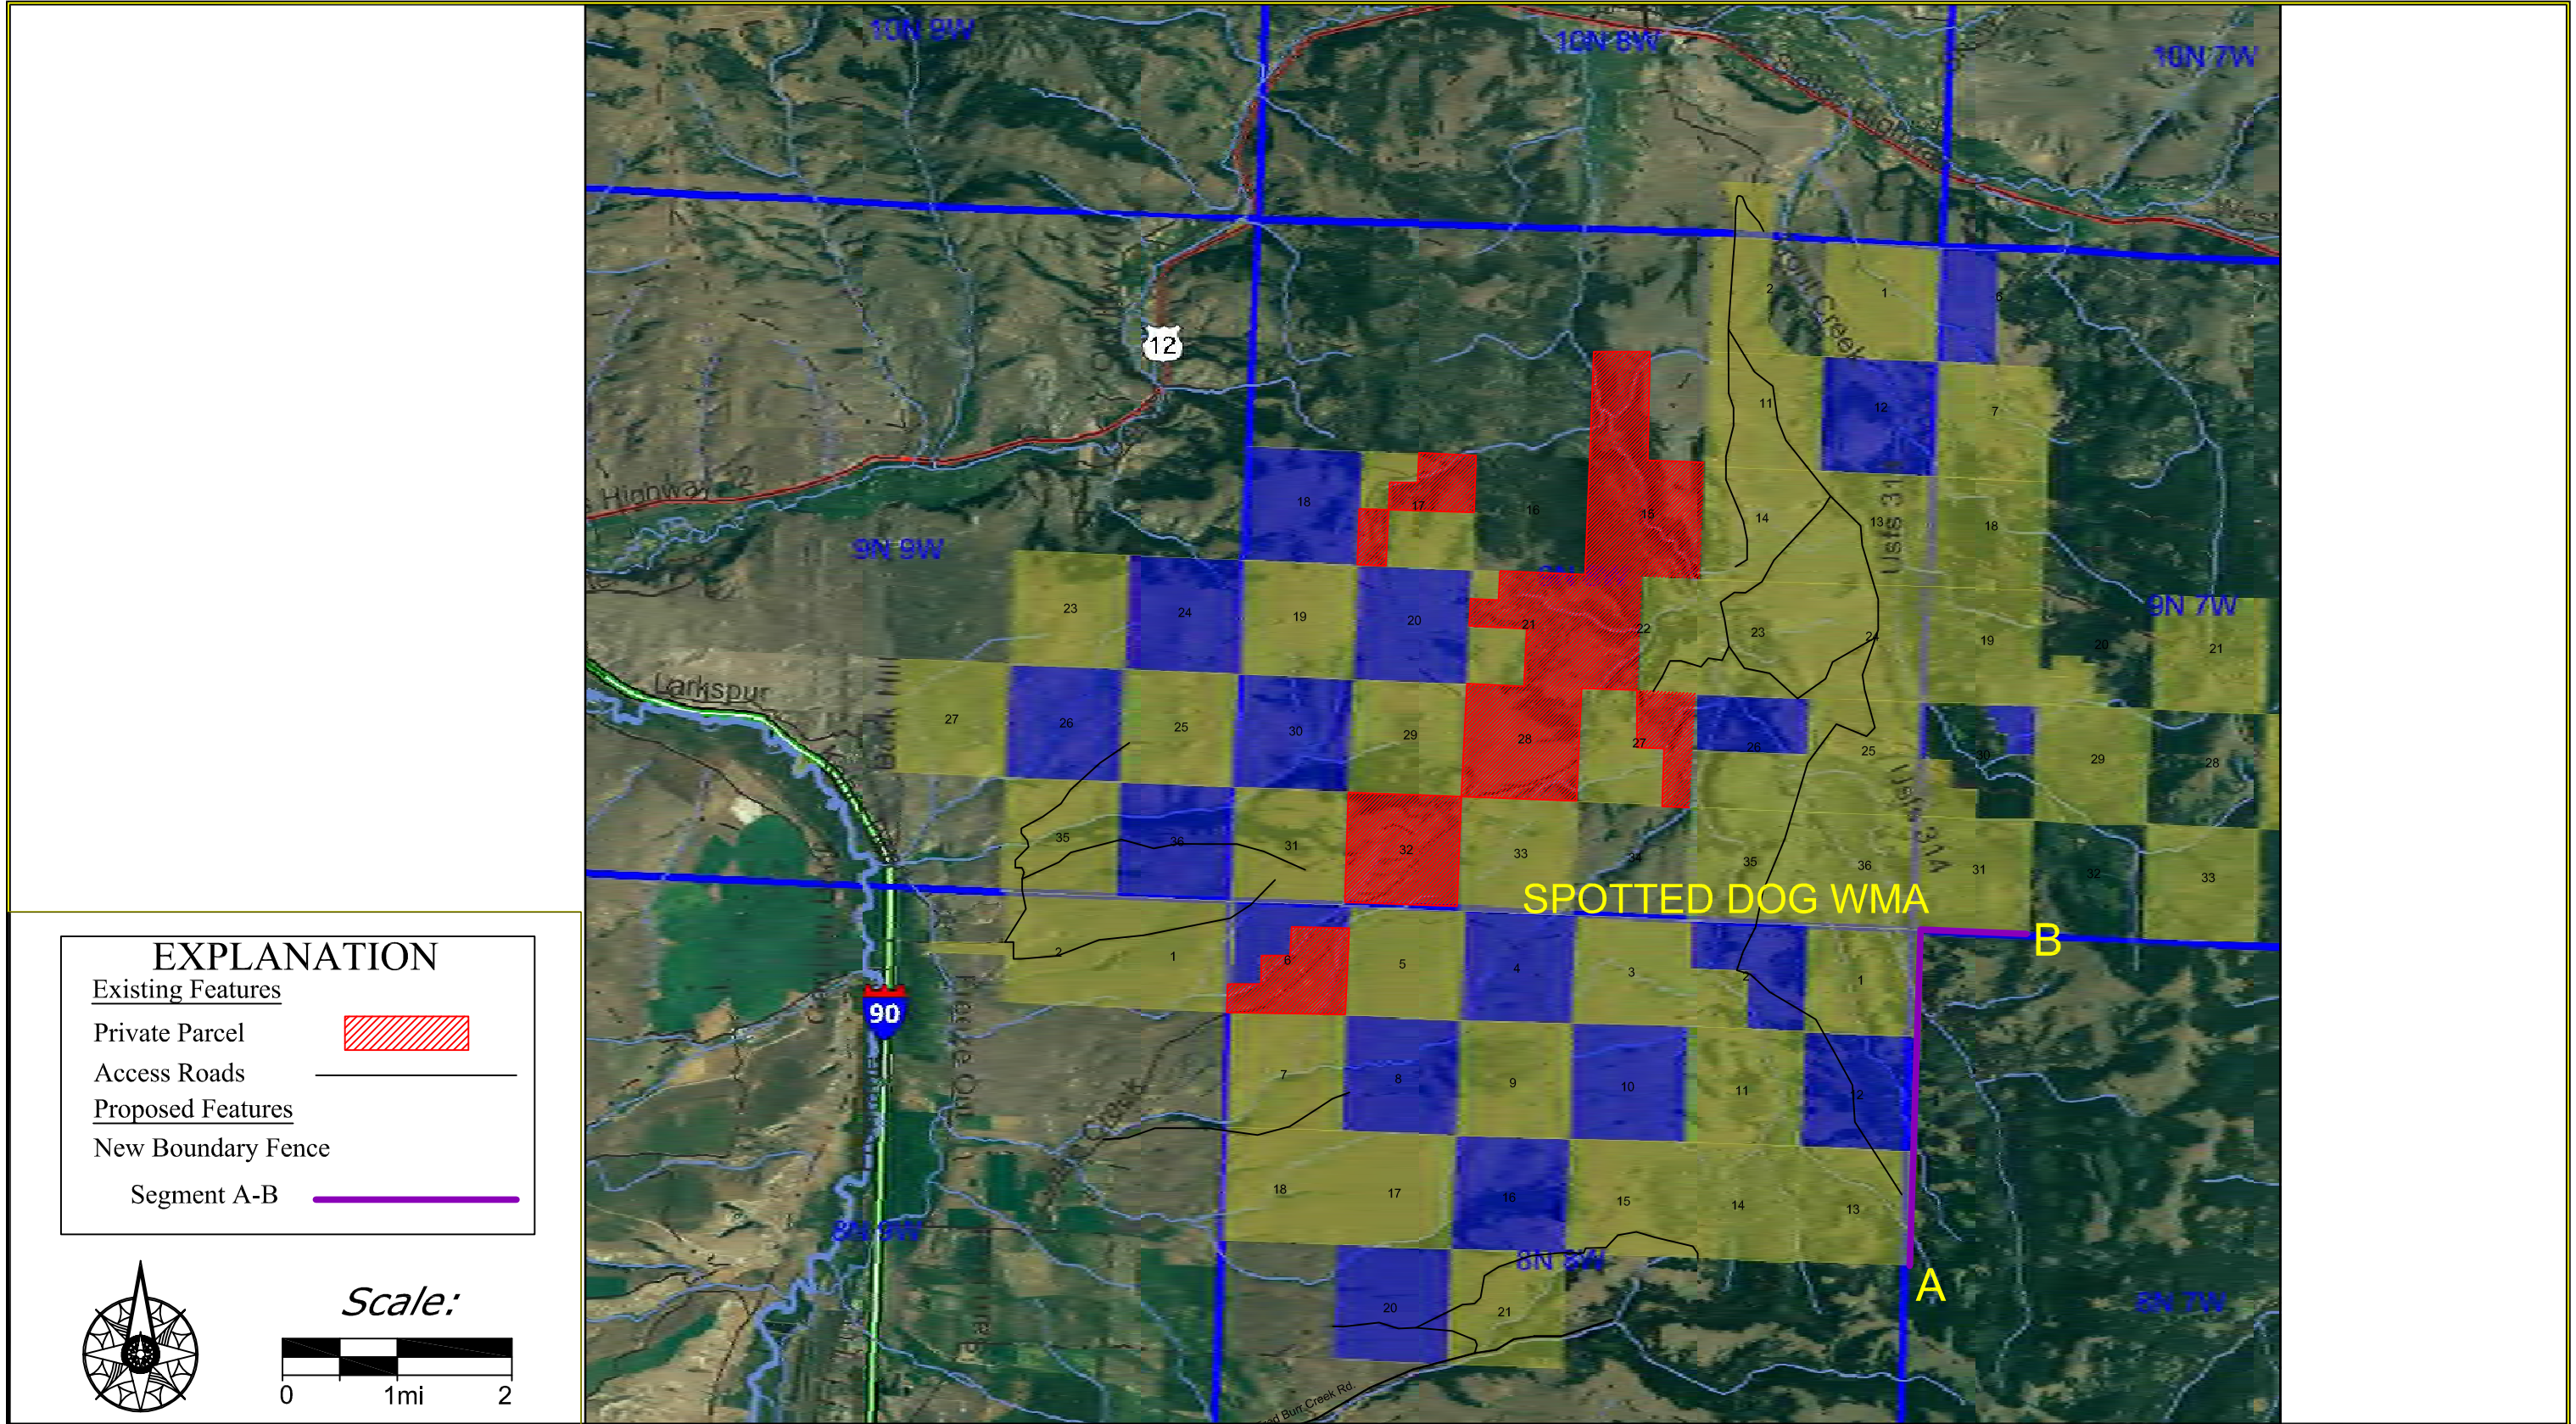

EXPLANATION

Existing Features



Private Parcel

Access Roads


Proposed Features

New Boundary Fence









Segment A-B



J. Mongoven	6/2016						Overall Site Plan Spotted Dog WMA (near Avon, MT)	SHEET: 2 of 5
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:			
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:			

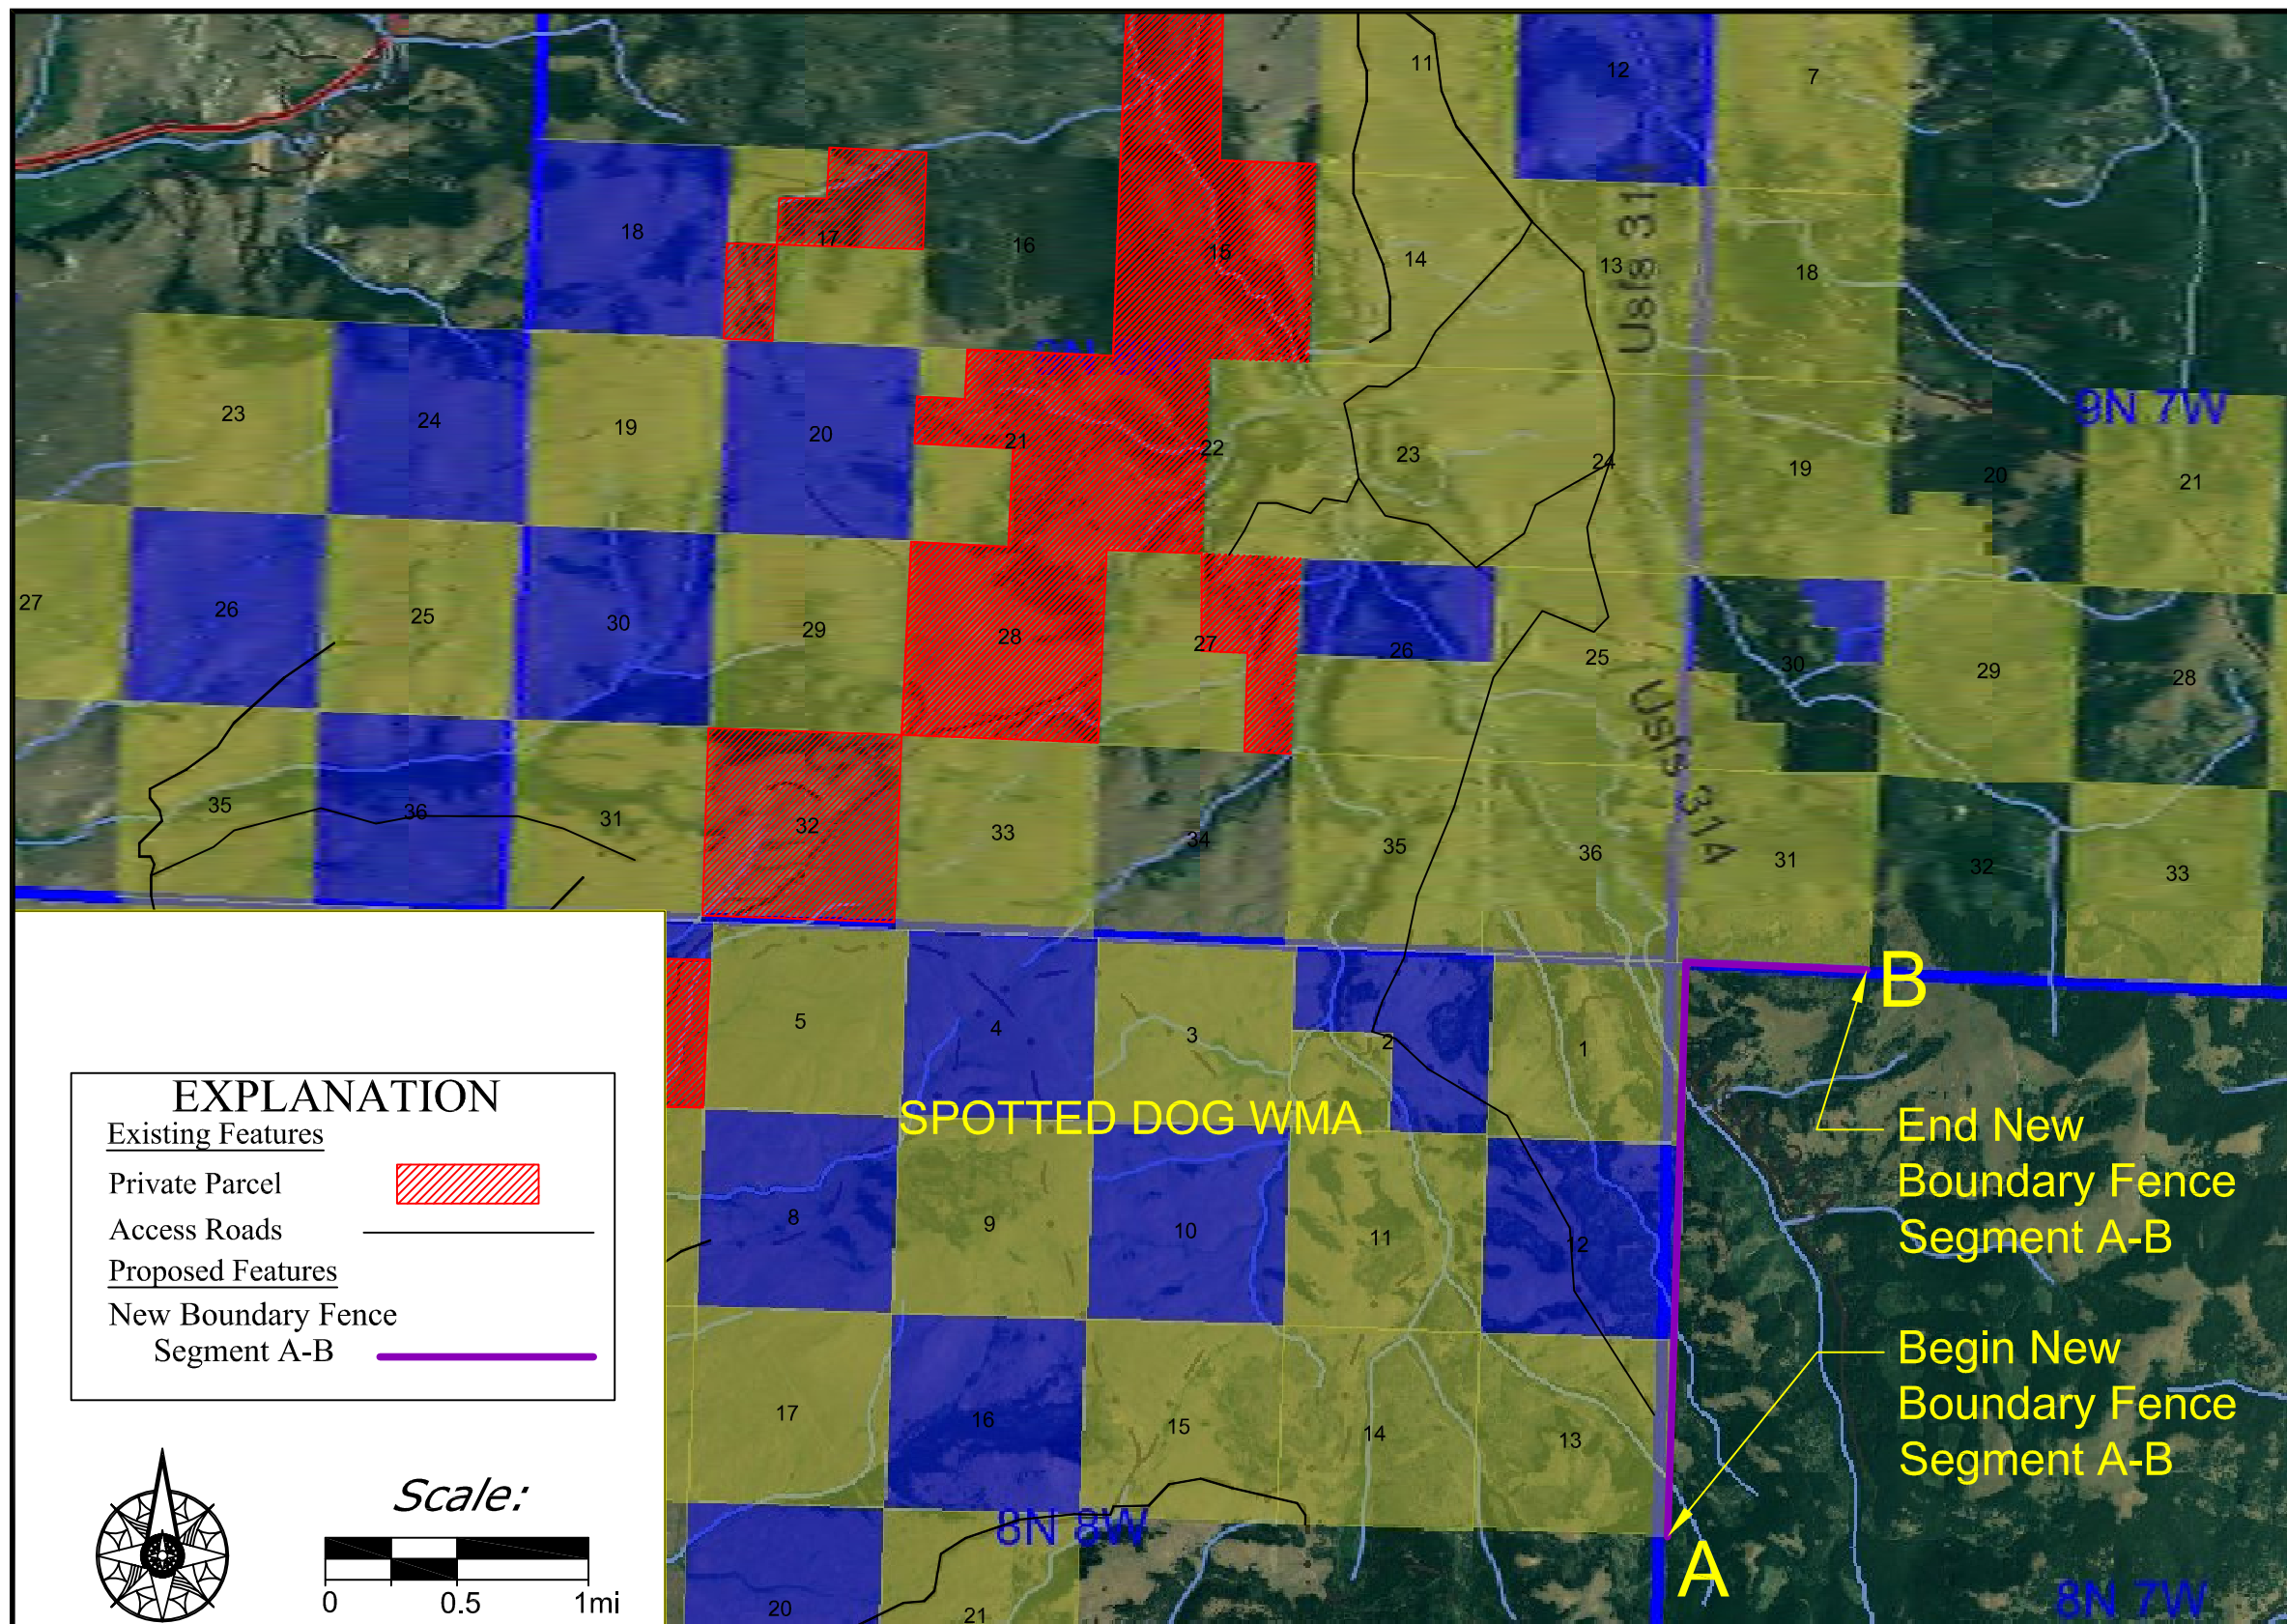

J. Mongoven 6/2016						 Montana Fish, Wildlife & Parks	Site Plan Segment A-G Spotted Dog WMA (near Avon, MT)	SHEET: 3 of 5
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:			
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:			

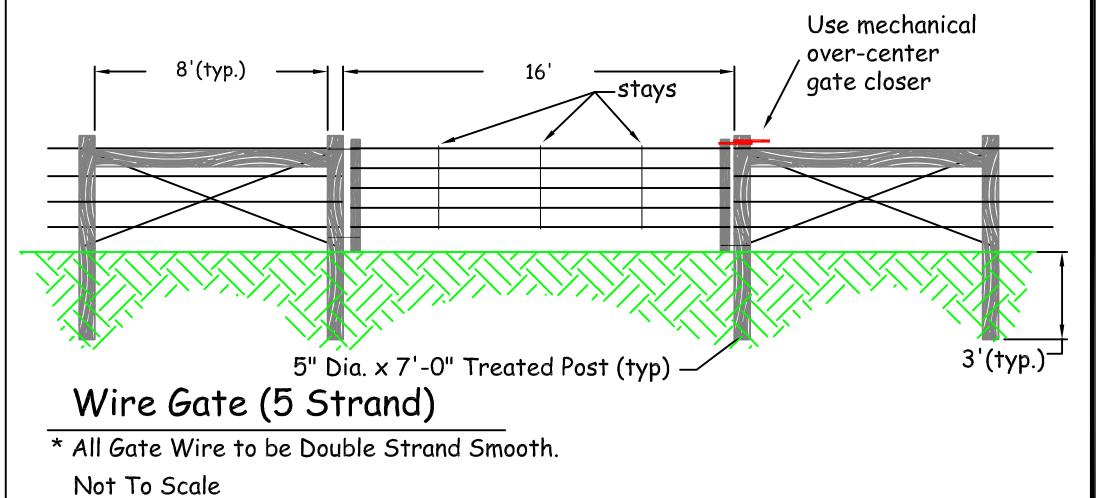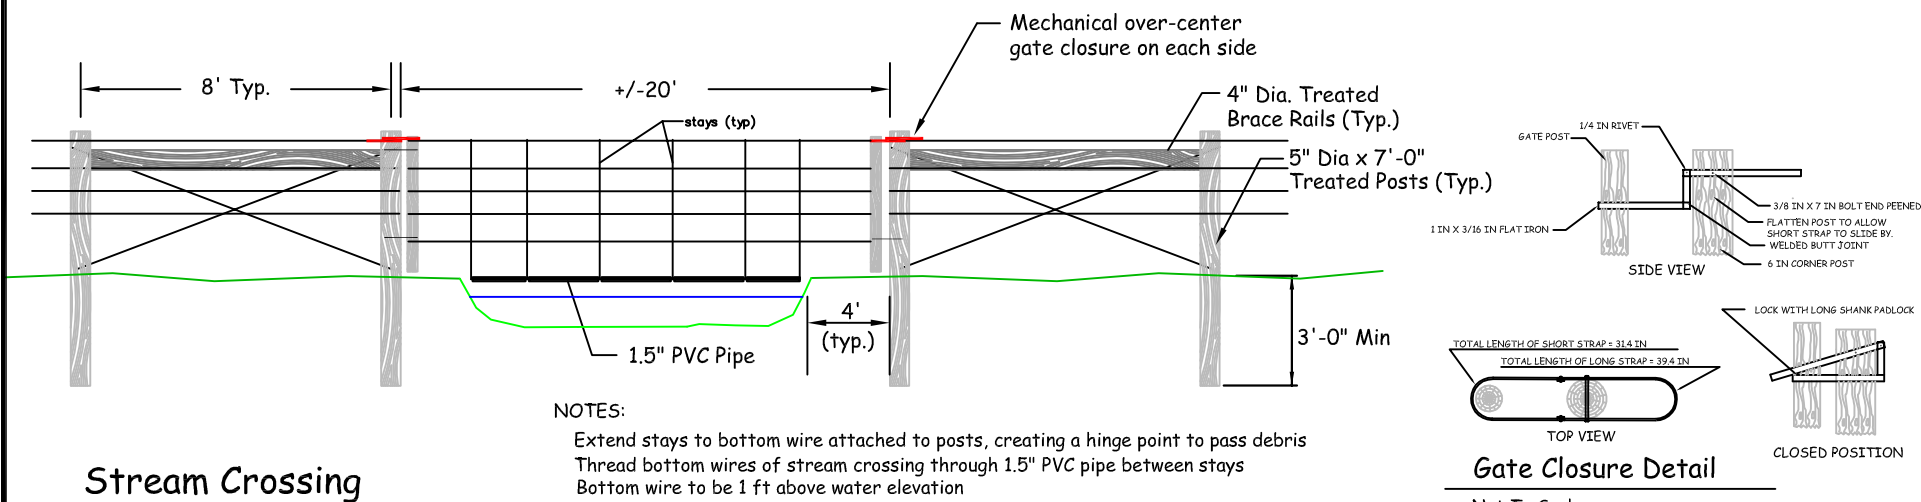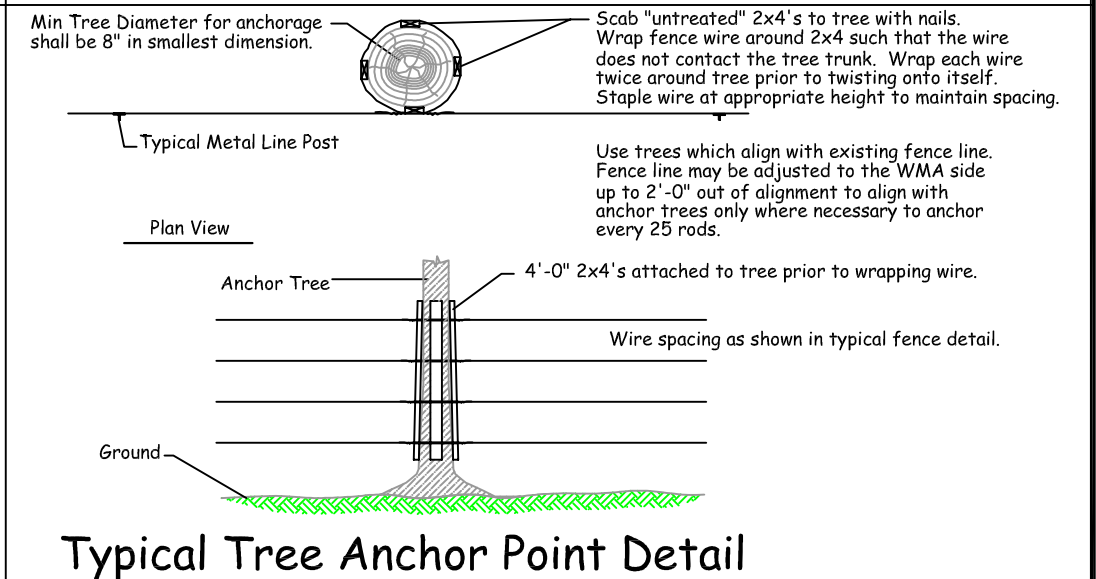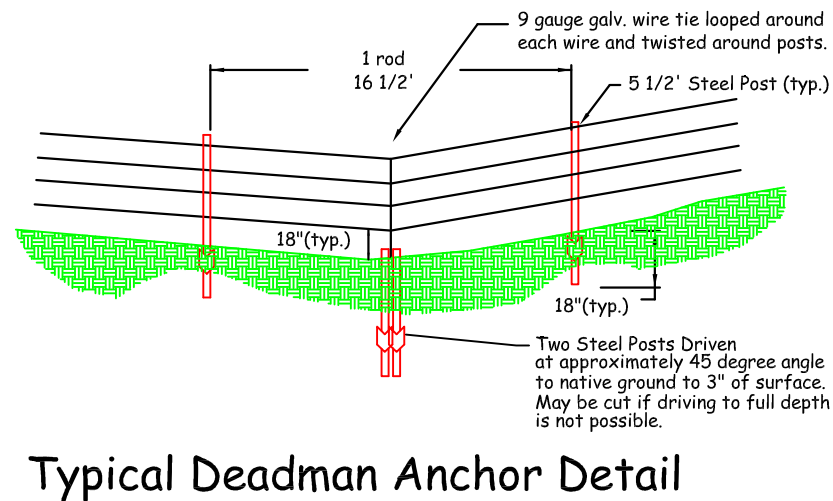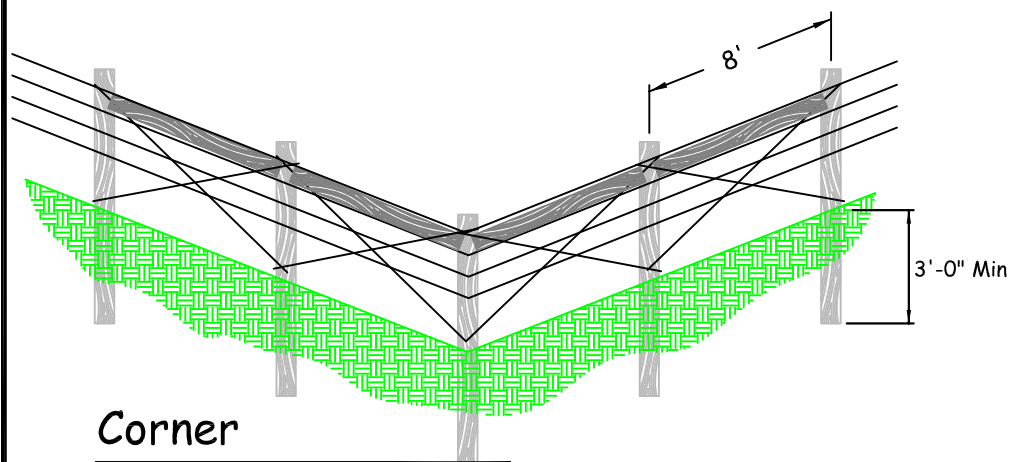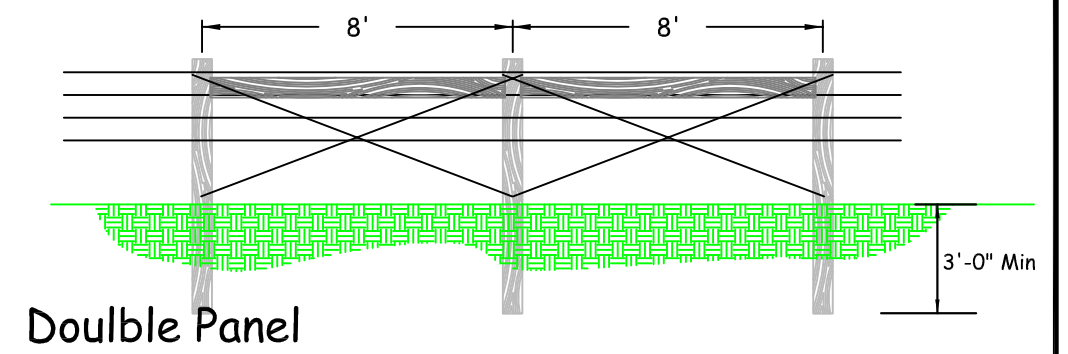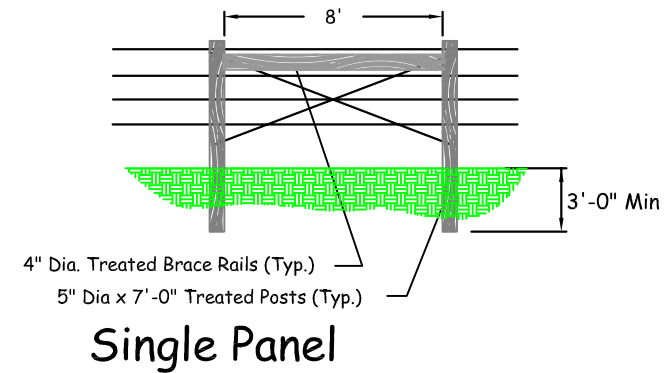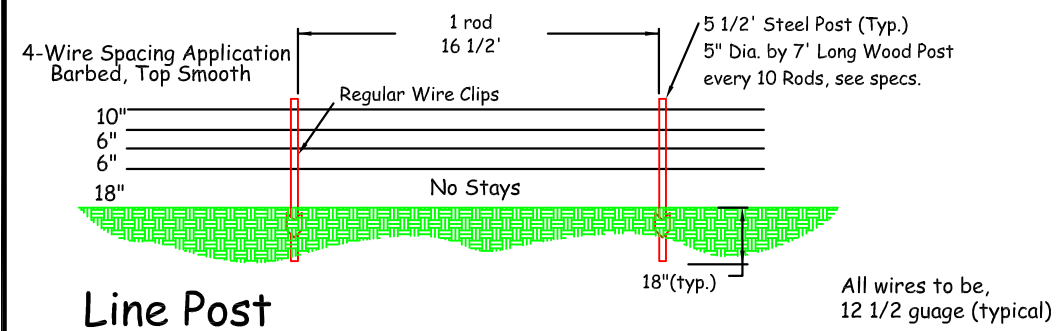

J. Mongoven		6/2016					
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:		
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:		



**Montana Fish,
Wildlife & Parks**


Fencing Details

Spotted Dog WMA (near Avon, MT)

4
of
5

WIRE JACKLEG FENCE - Details


(Not to Scale)

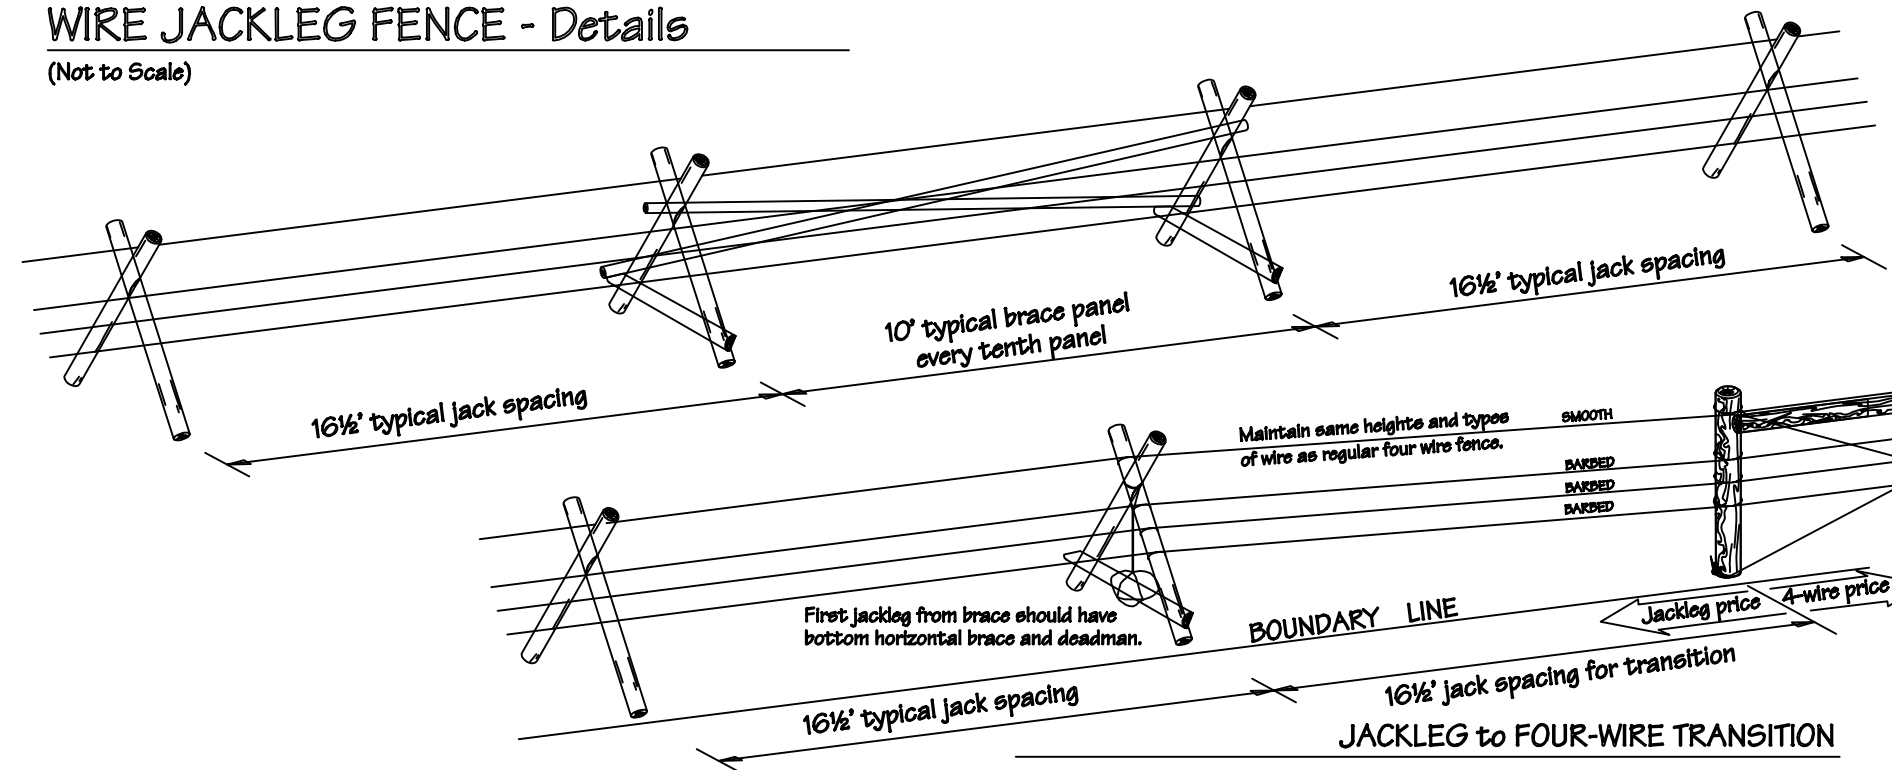

Jack posts min 5" diameter; 52" long, peeled, machine notched and butt treated per AWPA standards.


Fasten jacks together with 8" TimberLok® screws, 7" x 5/16" Ring Shank nails or approved equivalent.

Brace panel jacks shall have a notched full round post or split post at bottom to prevent jack from spreading and to add rigidity.

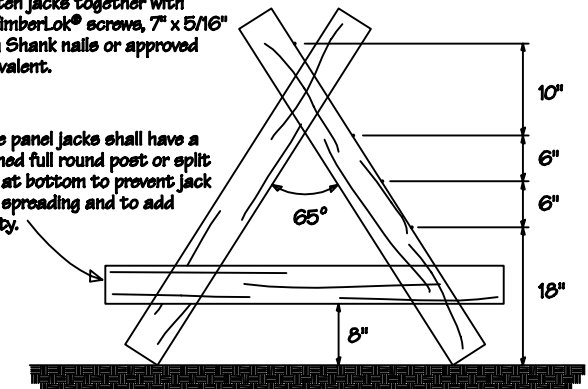


Top wire to be two strand, twisted smooth wire. Bottom three wires to be two strand twisted barbed wire. Spacing from ground up should be 18"/16"/16"/10"

Angle of fence face shall not be steeper than 10° from vertical. If face is too steep, rear post should be cut off at bottom and cut surface painted with wood preservative as per AWPA standards.

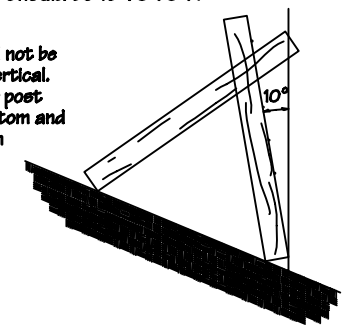

Vehicle Panel Gate

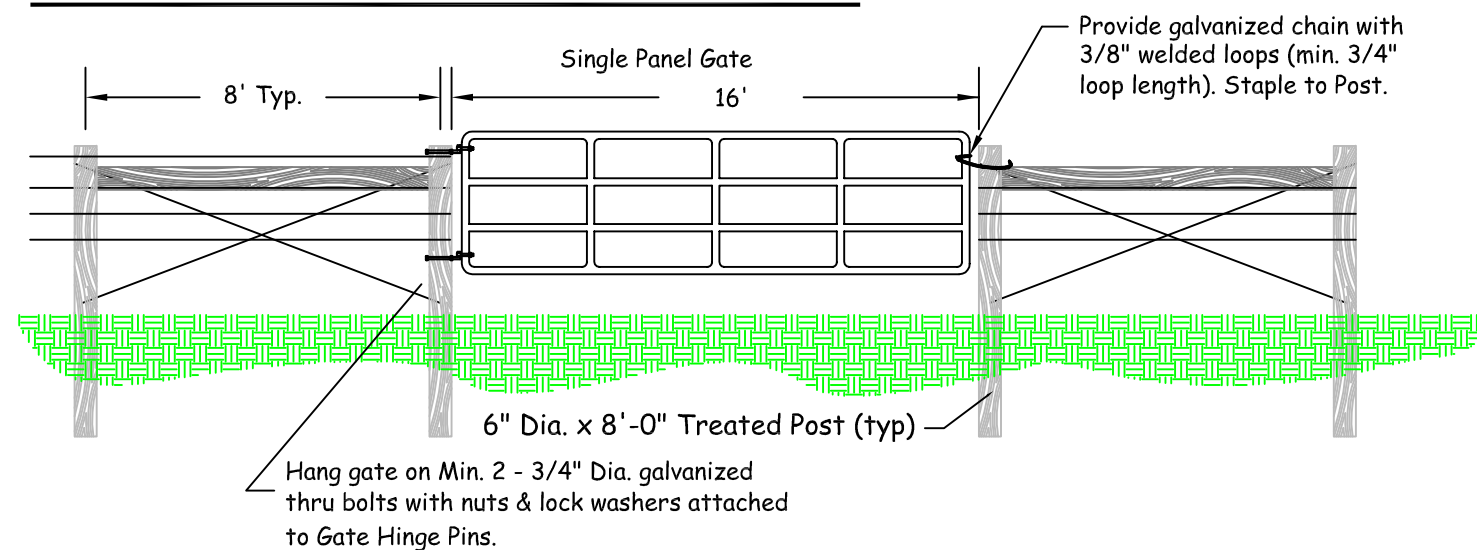

J. Mongoven	6/2016				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:



Montana Fish & Wildlife

Fencing Details
Spotted Dog WMA (near Avon, MT)

SHEET: 5 of 5